

Document Name LUNA Installation Instruction	Template Number GSPDPAD46	Document Number PDPAD460000692
Document Owner ESS Department	Template Rev 01	Document Rev AA001



### BEFORE YOU BEGIN

Read these instructions completely and carefully. Save these instructions for future use.

#### **⚠ WARNING**

**Risk of electrical shock.** Disconnect power before servicing or installing luminaire.

#### **⚠ WARNING**

**Risk of injury or damage.** Luminaire will fall if not installed properly. Follow installation instructions.

#### **⚠ WARNING**

**Risk of injury.** Wear safety glasses and gloves during installation and servicing.


### Important Notice

These instructions are not intended to cover all details or variations in the products nor do these instructions provide for every possible contingency concerning the installation, operations, or maintenance of the luminaire. Should additional information be required, contact your Greenstar Products Inc.

The contents of this manual shall not become a part of or modify any prior or existing agreement, commitment, or relationship. The sales contact contains the entire obligation of Greenstar Products Inc.'s standard limited warranty is the sole warranty obligation of Greenstar Products Inc. and any statements contained herein do not create new warranties or modify the existing warranty.

Any electrical or mechanical modifications to the luminaire without the prior written consent of Greenstar Products Inc. may void all warranties or other safety certifications. Unauthorized modifications may also result in safety hazards or damage to the luminaire. Misuse of the luminaire could result in injury and equipment damage. In no event will Greenstar Products Inc. be responsible or liable for direct, indirect, special, or consequential damage or injury that may result from the misuse of the luminaire.

## PRODUCT VIEWS




SIDE VIEW



TOP VIEW





BOTTOM VIEW



FRONT VIEW

Document Name LUNA Installation Instruction	Template Number GSPDPAD46	Document Number PDPAD460000692
Document Owner ESS Department	Template Rev 01	Document Rev AA001

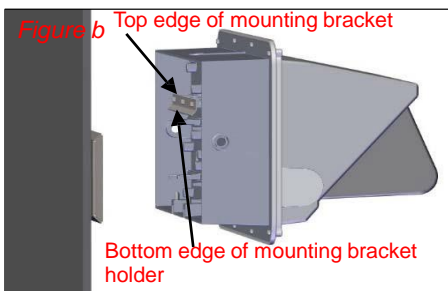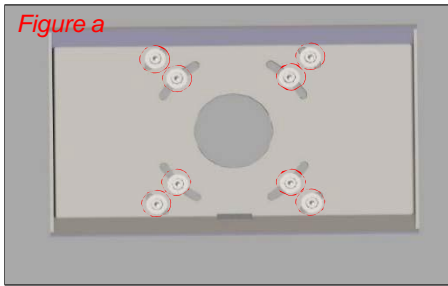

## Inspection

- The packaging has been designed to protect the luminaire from damage during transit. Inspect luminaire for damage before installation.

## Mounting the Luminaire

- Mount the LUNA mounting bracket to the wall using (8) M4x0.7x45 Socket head screw with the help of (8) M4 plain washer.(see figure a)
- Make the flexible wire connection to the Junction Box suitable for wet location and in accordance with the National Electrical Code (NEC).

### Wiring

- o **NOTE:** Make sure that all electrical connections are in accordance with the National Electrical Code (NEC), and any applicable local code requirements.
  - o **NOTE:** Check the rated input voltage on the luminaire product label, and verify that the supply voltage meets the product requirements.
  - o When making electrical connections, make sure that the ground wire on the supply side is connected to the ground wire of the luminaire. Under no circumstances the ground wire should be left disconnected. This will cause the luminaire to fail, and the luminaire will not be covered under warranty.

- Fasten the luminaire with (2) M6 x 1 x 25 Hex socket set screw cone point to restrict its movement.(see figure c)

## Maintenance

- Depending on environmental conditions it may be necessary to clean the lens in order to maintain a high-efficiency lens. (Use solvent-free cleaners)
- Remove the conduit and check the electrical connections. Make sure to conceal the conduit properly to the luminaire.

## Storage

- Prior to installation, the luminaire should be placed in a covered, dry storage. The storage location should not exceed the normal operating temperature of the luminaire.